

24-HOUR MECHANICAL TIMERS

MTR-2401


MTR-2402

VTEKE[®]

www.vteke.com.tr

FEATURES

The **Mechanical Timer** is suitable to be adjusted by user to automatically turn on and off electrical load such as lighting, neon signs, machines, radio, TV, agriculture pumps, control devices, fans, etc.

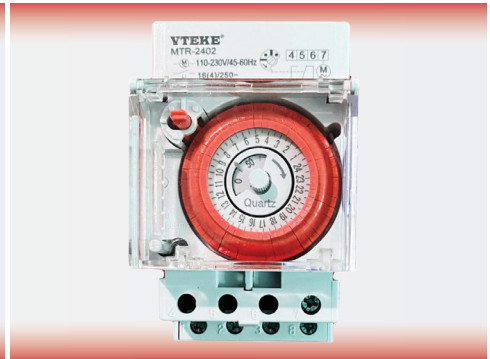

TECHNICAL DATA

	MTR-2401	MTR-2402
Operating Voltage	110-230VAC, 45-60Hz	110-230VAC, 45-60Hz
Power Consumption	0.5VA	2.5VA
Insulation Resistance	≥ 100MΩ	≥ 100MΩ
Drive	Quartz-controlled stepper motor	Quartz-controlled stepper motor
Program	24Hr	24Hr
Power Reserve	100 Hour	150 Hour
Switching Capacity	250VAC, cos Φ=1 16A 250VAC, cos Φ=0.6 4A	250VAC, cos Φ=1 16A 250VAC, cos Φ=0.6 3A
Lamp Load	1000W	1000W
Shortest Switching times	15 minutes	30 minutes
Time Accuracy at 25°C	≤ ±1sec/day (quartz)	≤ ±2sec/day (quartz)
Insulation Protection	IP20	IP20
Operating Temperature	-10°C - +50°C	-10°C - +55°C

DIMENSIONS

