






NON INSULATED TERMINALS

SC COPPER LUGS AND BUTT CONNECTORS

ITEM NO.	E	D	d	L
06-SC6-6	6.50	5.30	3.70	26.00
06-SC6-8*	8.40	5.30	3.70	28.00
06-SC10-6	6.50	6.10	4.60	28.50
06-SC10-8	8.50	6.10	4.60	28.50
06-SC16-6	6.50	7.30	5.70	32.00
06-SC16-8	8.50	7.30	5.70	32.00
06-SC16-10	10.50	8.00	6.00	38.50
06-SC16-16	17.00	8.50	6.10	41.00
06-SC25-8	8.50	9.20	7.30	40.00
06-SC25-10	10.50	9.50	7.30	45.50
06-SC25-12	13.00	9.50	7.30	45.50
06-SC35-6	6.50	11.00	9.00	42.00
06-SC35-8	8.50	11.00	9.00	42.00
06-SC35-10	10.50	11.00	9.00	42.00
06-SC35-12	13.00	11.00	9.00	42.00
06-SC50-8	8.50	12.00	9.60	48.50
06-SC50-10	10.50	12.00	9.60	48.50
06-SC50-12	13.00	12.50	9.80	57.00
06-SC70-8	8.50	14.50	11.50	53.00
06-SC70-10	10.50	14.50	11.50	53.00
06-SC70-12	13.00	14.50	11.50	53.00
06-SC95-8	8.50	17.00	14.00	60.00
06-SC95-10	10.50	17.00	14.00	60.00
06-SC95-12	13.00	17.00	14.00	60.00



06-SC120-10	10.50	19.50	16.10	65.00
06-SC150-12	13.00	21.00	16.80	73.00
06-SC185-12	13.00	24.00	19.60	83.00
06-SC240-12	13.00	26.00	21.40	94.00
06-SC300-16	17.00	30.00	24.80	110.00
06-SC630-20	21.00	42.00	34.60	145.00
06-GTY-16		7.40	5.40	35.00
06-GTY-25		9.00	6.70	40.00
06-GTY-35		11.50	8.10	45.00
06-GTY-50		13.10	9.50	50.00
06-GTY-70		14.60	11.30	55.00
06-GTY-95		17.00	13.50	60.00
06-GTY-120		19.00	15.20	65.00
06-GTY-150		21.50	17.00	70.00





NON-INSULATED KS TERMINALS



ITEM NO	DIMENSIONS						
	L	B	W	d	D	H	T
06-KS10-12	22.0	8.0	4.3	4.5	6.9	2.4	1.1
06-KS16-13	26.0	10.0	5.5	5.9	8.4	2.6	1.2
06-KS25-15	33.5	13.5	6.8	7.0	9.5	2.6	1.2
06-KS35-20	40.5	16.0	8.0	8.7	11.8	3.2	1.5
06-KS50-20	45.0	19.0	9.5	9.8	13.6	3.8	1.8
06-KS70-25	55.0	24.0	11.0	11.6	15.8	4.2	2.0
06-KS95-25	55.0	24.0	12.5	13.7	18.9	5.2	2.5
06-KS120-34	62.0	26.0	14.3	15.1	21.3	6.2	3.0

NON-INSULATED CORD-END TERMINALS

ITEM NO	Wire Range	DIMENSIONS					
		L	Tolerance	d1	Tolerance	D1	D2
06-EN5006	0.50	6.0	±1.5	1.0	±0.14	1.3	1.8
06-EN5008		8.0					
06-EN5010		10.0					
06-EN7506	0.75	6.0	±1.5	1.2	±0.14	1.5	2.3
06-EN7508		8.0					
06-EN7510		10.0					
06-EN1006	1.00	6.0	±1.5	1.4	±0.14	1.7	2.5
06-EN1008		8.0					
06-EN1010		10.0					
06-EN1012		12.0					
06-EN1507	1.50	7.0	±1.5	1.7	±0.25	2.0	2.8
06-EN1508		8.0					
06-EN1510		10.0					
06-EN1512		12.0					
06-EN2507	2.50	7.0	±1.5	2.2	±0.25	2.5	3.4
06-EN2508		8.0					
06-EN2510		10.0					
06-EN2512		12.0					
06-EN4008	4.00	8.0	±1.5	2.8	±0.25	3.2	4.0
06-EN4009		9.0					
06-EN4010		10.0					
06-EN4012		12.0					
06-EN4015		15.0	±2				
06-EN4018		18.0					
06-EN6010	6.00	10.0	±1.5	3.5	±0.3	3.9	4.7
06-EN6012		12.0					
06-EN6015		15.0	±2				
06-EN6018		18.0					
06-EN10012	10.00	12.0	±2	4.5	±0.3	4.9	5.8
06-EN10015		15.0					
06-EN10018		18.0					
06-EN16012	16.00	12.0	±2	5.8	±0.3	6.2	7.5
06-EN16015		15.0					

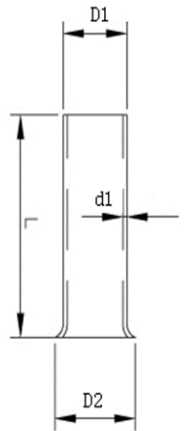

06-EN16018		18.0					
06-EN25015	25.00	15.0	±2	7.3	±0.4	7.7	9.5
06-EN25016		16.0					
06-EN25018		18.0					
06-EN25022		22.0					
06-EN35016	35.00	16.0	±2	8.3	±0.4	8.7	10.5
06-EN35018		18.0					
06-EN35020		20.0					
06-EN35025		25.0					
06-EN50018	50.00	18.0	±2	10.3	±0.4	10.9	13.0
06-EN50020		20.0					
06-EN50025		25.0					