
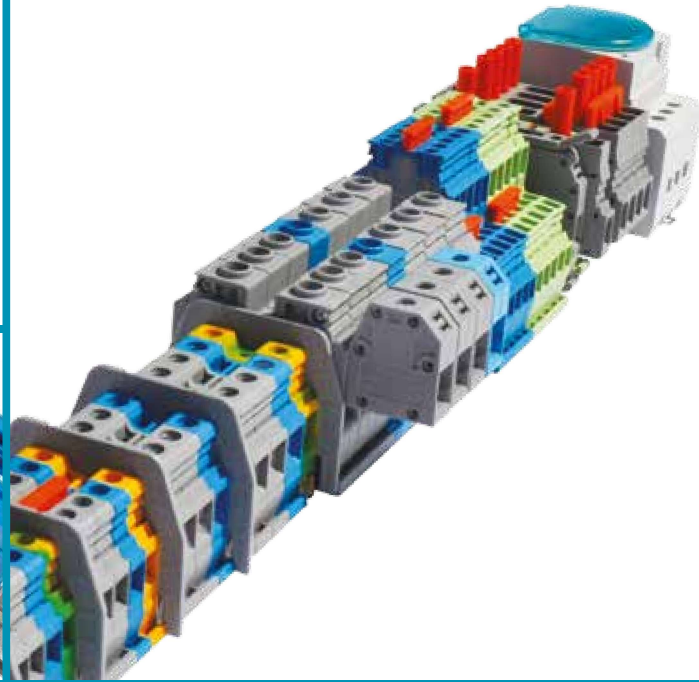




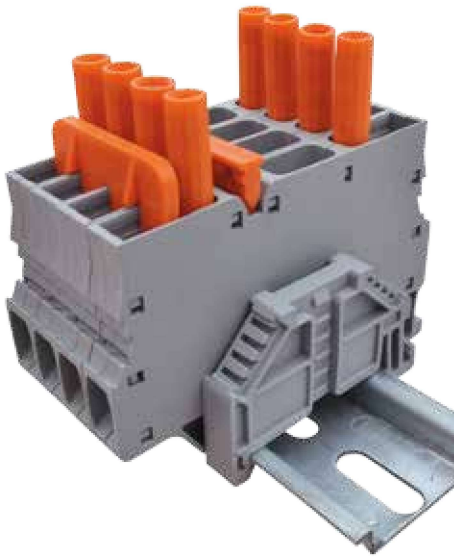

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS

Technical Features ;

- Does not require final plate (Both sides are closed), provides cost saving and better isolation.
- Symmetrical (Mountable to rail at both directions)
- Provides opportunity to assemble cable section from 0,06 mm² to 120 mm²
- Labelling system appropriate for roll labeling.
- Double sided bridging opportunity.
- Isolated comb bridge can be used from 1,5 mm² to 10 mm².
- Screw system is flat headed for sections 10 mm² to 35 mm².
- In 50 mm² and following sections, the screw system is allen headed.
- MRK Series stopper can be used both as group label or end label.


Range of Products;

- MRK Series standard rail terminal blocks
- MRK Series double rail terminal blocks
- MRK Series fused rail terminal blocks
- MRK Series knife rail terminal blocks
- MRK Series test disconnect terminal blocks
- MRK Series earth rail terminal blocks
- MRK and OPK Series stoppers
- MRK Series separation plate
- MRK Series Cross Connections
- MRK Series stud terminal blocks for cable lugs

MRK SERIES





• In MRK Series, the roll label system can be applied to the products from 1.5 mm² to 35 mm² cross sections.



• The main body of which end plate is embedded, is manufactured as monolithic.




• For MRK Series a new cross connection system is used from 1.5 mm² up to 10 mm².

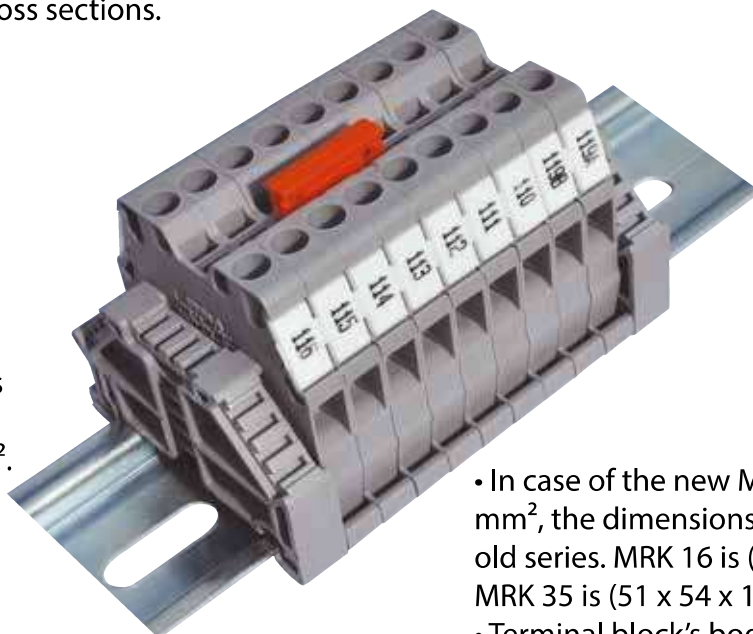

• In case of the new MRK 16 mm² and 35 mm², the dimensions are smaller than the old series. MRK 16 is (51 x 54 x 12) mm, MRK 35 is (51 x 54 x 15) mm.

• Terminal block's body and end plate are connected within 4 steel screws.






• Due to the U form at the bottom of the sleeve system of MRK 6-10-16-25 and 35, much contact of the sleeve is provided to the cable.

• MRK 16 and 35 mm², the leg parts of terminal can be locked more better because of the same width as the terminal.



MOUNTABLE RAIL TYPES



MRK SERIES COLOUR CODES


Colour Options:

ONKA-1001 the last digit of this code refers to product color. To choose product color you can use the color codes next.

MINT GREEN


1	GREY	2	BLUE	5	YELLOW	8
PRIMARY COLOR	CREAM	3	BROWN	6	GREEN	9
	BLACK	4	RED	7		

HYBRID CONNECTION RAIL TERMINAL BLOCKS

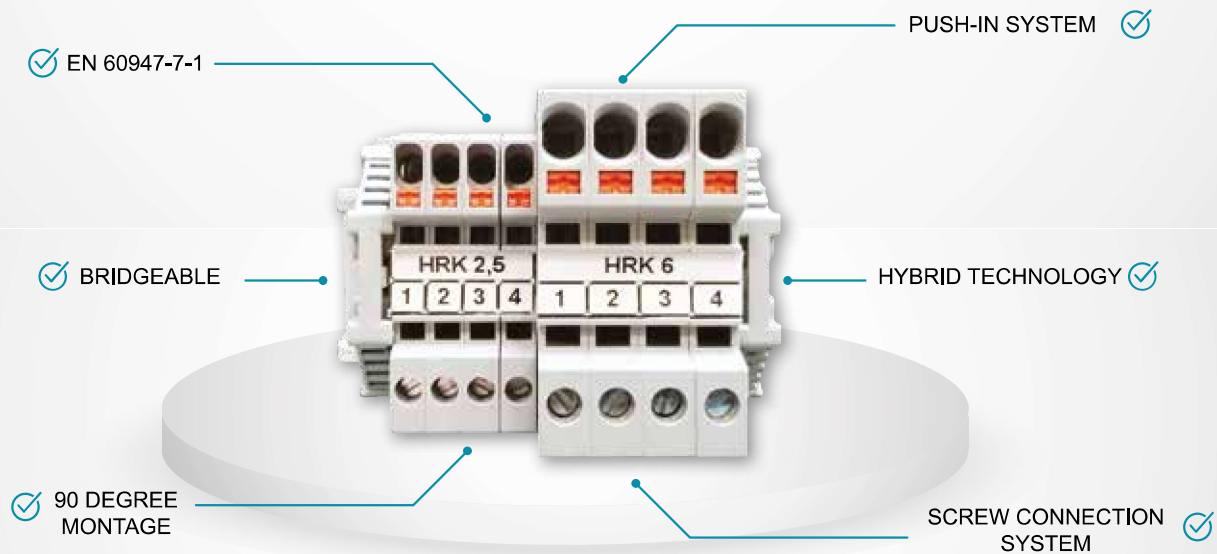

Onka®

Choice of Professionals



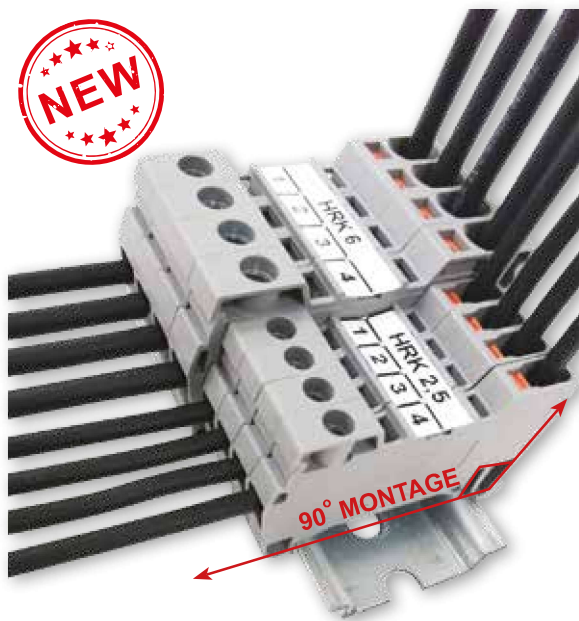


- Coordination between assembler and operator
- Ergonomic and aesthetics inside panels with 90° connection possibility
- Distribution and collection solutions through multi-connection circuit
- Bridging possibilities withing rated current
- EN 60947-7-1 directive
- 2,5mm² ve 6 mm² Cable Sections
- 10 Different Color Options
- From 0.34 mm² to 6 mm² With/Without end Terminals, Single Core / Multiple Core (Flexible) Connections
- Color Coding / Dekafix / Roll Labelling

ACCESSORIES

- 35 mm DIN Rail
- 2.5 and 6 mm² Cross Connections
- MRK and OPK Series Dekafixes
- MRK and OPK Series Stoppers

MOUNTABLE RAIL TYPES




HRK SERIES COLOUR CODES

Colour Options:

ONKA-100 1 the last digit of this code refers to product color. To choose product color you can use the color codes next.

GREY	2	BLUE	5	YELLOW	8
CREAM	3	BROWN	6	GREEN	9
BLACK	4	RED	7		

HRK HYBRID TERMINAL BLOCKS

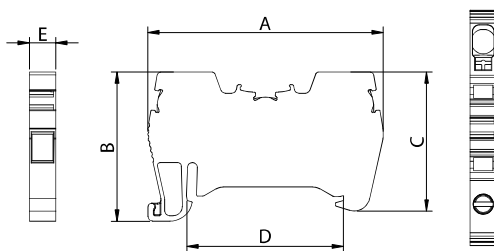
HRK 2,5
Order No: 0362


Dimension (mm)	A	B	C	D	E
	52	33	30,75	34,5	5,8

MATERIAL

Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Spring	Stainless Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	10 mm
Torque	0,4 Nm



DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V0	
	Order No.	Order No.	Pcs.
COLOUR			
GREY	0362	0332	100
CREAM	0363	0333	100
BLACK	0364	0334	100
BLUE	0365	0335	100
BROWN	0366	0336	100
RED	0367	0337	100
YELLOW	0368	0338	100
GREEN	0369	0339	100

ACCESSORIES

	Order No.	Section	Pcs.
Cross Connection 	1925	2,5 / 2	100
	1926	2,5 / 3	100
	1927	2,5 / 4	75
	1928	2,5 / 10	30
	1929	2,5 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 4440 / 4442 / 9540 / 7301		

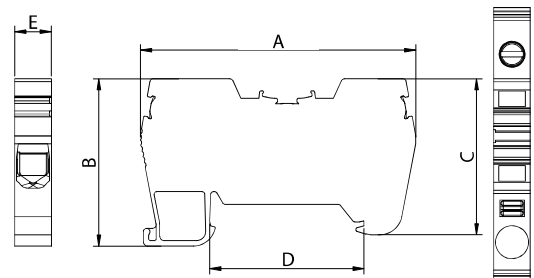
HRK 6
Order No: 0372


Dimension (mm)	A	B	C	D	E
	61,8	37,6	35	34,5	8,2

MATERIAL

Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Spring	Stainless Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	10 mm
Torque	0,4 Nm

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V0	
	Order No.	Order No.	Pcs.
COLOUR			
GREY	0372	0342	100
CREAM	0373	0343	100
BLACK	0374	0344	100
BLUE	0375	0345	100
BROWN	0376	0346	100
RED	0377	0347	100
YELLOW	0377	0347	100
GREEN	0378	0348	100


ACCESSORIES

	Order No.	Section	Pcs.
Cross Connection 	1945	6 / 2	100
	1946	6 / 3	100
	1947	6 / 4	75
	1948	6 / 10	30
	1949	6 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS



MRK 1.5
Order No: 1002



Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	5,1

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	10 mm
Torque	0,4 Nm


DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	17.5 A	17.5 A
Section	1,5 mm ²	14 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1002	0752	100
CREAM	1003	0753	100
BLACK	1004	0754	100
BLUE	1005	0755	100
BROWN	1006	0756	100
RED	1007	0757	100
YELLOW	1008	0758	100
GREEN	1009	0759	100

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1920	1,5 / 2	100
	1921	1,5 / 3	100
	1922	1,5 / 4	100
	1923	1,5 / 10	30
	1924	1,5 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 5443 / 4442 / 9540 / 7301		



MRK 2.5
Order No: 1012



Dimensions (mm)	A	B	C	D	E
	40	40	34,5	36,5	5,9

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	10 mm
Torque	0,4 Nm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	24 A	24 A
Section	2,5 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059


COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1012	0762	100
CREAM	1013	0763	100
BLACK	1014	0764	100
BLUE	1015	0765	100
BROWN	1016	0766	100
RED	1017	0767	100
YELLOW	1018	0768	100
GREEN	1019	0769	100

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1925	2,5 / 2	100
	1926	2,5 / 3	100
	1927	2,5 / 4	75
	1928	2,5 / 10	30
	1929	2,5 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 4440 / 4442 / 9540 / 7301		

MRK SERIES SCREWED TYPE RAIL TERMINAL BLOCKS



MRK 4
Order No: 1022



Dimensions (mm)	A	B	C	D	E
	40	40	34,5	36,5	6,7

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	10 mm
Torque	0,5 Nm


DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	32 A	32 A
Section	4,0 mm ²	10 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1022	0772	100
CREAM	1023	0773	100
BLACK	1024	0774	100
BLUE	1025	0775	100
BROWN	1026	0776	100
RED	1027	0777	100
YELLOW	1028	0778	100
GREEN	1029	0779	100

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1930	4 / 2	100
	1931	4 / 3	100
	1932	4 / 4	50
	1933	4 / 10	30
	1934	4 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 4390 / 4442 / / 7301		



MRK 6
Order No: 1032



Dimensions (mm)	A	B	C	D	E
	40	40	34,5	36,5	8,2

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	12 mm
Torque	0,8 Nm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Current	41 A	41 A
Section	6 mm ²	8 AWG
Norm	EN-60947-7-1	UL 1059



COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1032	0782	100
CREAM	1033	0783	100
BLACK	1034	0784	100
BLUE	1035	0785	100
BROWN	1036	0786	100
RED	1037	0787	100
YELLOW	1038	0788	100
GREEN	1039	0789	100

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1935	6 / 2	100
	1936	6 / 3	50
	1937	6 / 4	50
	1938	6 / 10	15
	1939	6 / 20	10
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS



MRK 10
Order No: 1042




Dimensions (mm)	A	B	C	D	E
	40	40	34,5	36,5	9,5

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	12 mm
Torque	0,8 Nm



DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	57 A
Section	10 mm ²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1042	0792	100
CREAM	1043	0793	100
BLACK	1044	0794	100
BLUE	1045	0795	100
BROWN	1046	0796	100
RED	1047	0797	100
YELLOW	1048	0798	100
GREEN	1049	0799	100

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1940	10 / 2	100
	1941	10 / 3	50
	1942	10 / 4	50
	1943	10 / 10	15
	1944	10 / 20	10
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		



MRK 16
Order No: 1132



Dimensions (mm)	A	B	C	D	E
	51	54	34,5	51	12


MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	18 mm
Torque	2,0 Nm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	76 A	63 A
Section	16 mm ²	6 AWG
Norm	EN-60947-7-1	UL 1059


COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1132	0882	50
CREAM	1133	0883	50
BLACK	1134	0884	50
BLUE	1135	0885	50
BROWN	1136	0886	50
RED	1137	0887	50
YELLOW	1138	0888	50
GREEN	1139	0889	50

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	2257	16 / 2	50
	2258	16 / 3	40
	2259	16 / 4	40
	2260	16 / 5	25
	2265	16 / 10	10
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS

**MRK 25**

Order No: 0302




Dimensions (mm)	A	B	C	D	E
	58	63,2	34,5	61,2	12

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	18 mm
Torque	2,0 Nm
DATA	
	TSE / CE
Voltage	750 V
Current	101 A
Section	25 mm ²
Norm	EN-60947-7-1


COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1052	0802	50
CREAM	1053	0803	50
BLACK	1054	0804	50
BLUE	1055	0805	50
BROWN	1056	0806	50
RED	1057	0807	50
YELLOW	1058	0808	50
GREEN	1059	0809	50

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	2257	16 / 2	50
	2258	16 / 3	40
	2259	16 / 4	40
	2260	16 / 5	25
	2265	16 / 10	10
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		

With Non - Insulated Cord End Terminals

**MRK 35**

Order No: 1062



Dimensions (mm)	A	B	C	D	E
	58	63,2	34,5	61,2	15

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	18 mm
Torque	2,0 Nm
DATA	
	TSE / CE
Voltage	750 V
Current	125 A
Section	35 mm ²
Norm	EN-60947-7-1


COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1062	0812	30
CREAM	1063	0813	30
BLACK	1064	0814	30
BLUE	1065	0815	30
BROWN	1066	0816	30
RED	1067	0817	30
YELLOW	1068	0818	30
GREEN	1069	0819	30

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	2266	35 / 2	50
	2267	35 / 3	40
	2268	35 / 4	40
	2269	35 / 5	25
	2274	35 / 10	10
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS



MRK 50
Order No: 1072

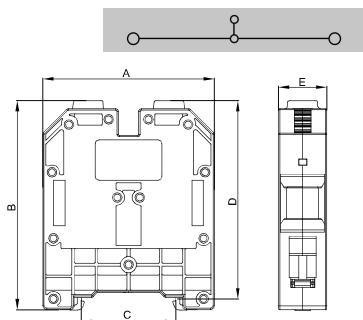

Dimensions (mm)	A	B	C	D	E
	64	78	34,5	74	18

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	DKP
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	18 mm
Torque	6,0 Nm


DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	150 A	100 A
Section	50 mm ²	AWG 1/O str
Norm	EN-60947-7-1	UL 1059

COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1072	0822	20
CREAM	1073	0823	20
BLACK	1074	0824	20
BLUE	1075	0825	20
BROWN	1076	0826	20
RED	1077	0827	20
YELLOW	1078	0828	20
GREEN	1079	0829	20

ACCESSORIES	
Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540



MRK 70
Order No: 1082



Dimensions (mm)	A	B	C	D	E
	64	78	34,5	74	21

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	DKP
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	20 mm
Torque	6,0 Nm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	192 A	125 A
Section	70 mm ²	AWG 2/O str
Norm	EN-60947-7-1	UL 1059



COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1082	0832	20
CREAM	1083	0833	20
BLACK	1084	0834	20
BLUE	1085	0835	20
BROWN	1086	0836	20
RED	1087	0837	20
YELLOW	1088	0838	20
GREEN	1089	0839	20

ACCESSORIES	
Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540

MRK SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS

**MRK 95**

Order No: 1092



Dimensions (mm)	A	B	C	D	E
	75	88	34,5	83	23,8

MATERIAL

Body	PA6.6
Bridge	Copper
Contact	DKP
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	20 mm
Torque	6,0 Nm

DATA	TSE / CE
Voltage	1000 V
Current	232 A
Section	95 mm ²
Norm	EN-60947-7-1

COLOURS


	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1092	0842	10
CREAM	1093	0843	10
BLACK	1094	0844	10
BLUE	1095	0845	10
BROWN	1096	0846	10
RED	1097	0847	10
YELLOW	1098	0848	10
GREEN	1099	0849	10

ACCESSORIES

Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540

**MRK 120**

Order No: 1102



Dimensions (mm)	A	B	C	D	E
	75	88	34,5	83	26

MATERIAL

Body	PA6.6
Bridge	Copper
Contact	DKP
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	20 mm
Torque	6,0 Nm

DATA	TSE / CE
Voltage	1000 V
Current	269 A
Section	120 mm ²
Norm	EN-60947-7-1

COLOURS

	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	1102	0852	10
CREAM	1103	0853	10
BLACK	1104	0854	10
BLUE	1105	0855	10
BROWN	1106	0856	10
RED	1107	0857	10
YELLOW	1108	0858	10
GREEN	1109	0859	10

ACCESSORIES


Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540

MRK SLIM SERIES SCREW CONNECTION RAIL TERMINAL BLOCKS



MRK SLIM 2.5

Order No: 0902



Dimension (mm)	A	B	C	D	E
	40	40	34,5	36,5	5,1

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	10 mm
Torque	0,4 Nm

DATA	TSE / CE
Voltage	750 V
Current	24 A
Section	2,5 mm ²
Norm	EN-60947-7-1


COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	0902	0862	100
CREAM	0903	0863	100
BLACK	0904	0864	100
BLUE	0905	0865	100
BROWN	0906	0866	100
RED	0907	0867	100
YELLOW	0908	0868	100
GREEN	0909	0869	100

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1920	2,5 / 2	100
	1921	2,5 / 3	100
	1922	2,5 / 4	100
	1923	2,5 / 10	30
	1924	2,5 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 5443 / 4442 / 9540 / 7301		



MRK SLIM 4

Order No: 0912



Dimensions (mm)	A	B	C	D	E
	40	40	34,5	36,5	5,9


MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	10 mm
Torque	0,4 Nm

DATA	TSE / CE
Voltage	750 V
Current	32 A
Section	4 mm ²
Norm	EN-60947-7-1


COLOURS			
	V2	V0	
COLOUR	Order No.	Order No.	Pcs.
GREY	0912	0872	100
CREAM	0913	0873	100
BLACK	0914	0874	100
BLUE	0915	0875	100
BROWN	0916	0876	100
RED	0917	0877	100
YELLOW	0918	0878	100
GREEN	0919	0879	100

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1925	4 / 2	100
	1926	4 / 3	100
	1927	4 / 4	75
	1928	4 / 10	30
	1929	4 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 4440 / 4442 / 9540 / 7301		

MRK SLIM SERIES SCREWED TYPE RAIL TERMINAL BLOCKS



MRK SLIM 35
Medium Size
Order No: 1142



Dimensions (mm)	A	B	C	D	E
	50,7	54	34,5	51	15

MATERIAL

Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	18 mm
Torque	2,0 Nm

DATA	TSE / CE
Voltage	750 V
Current	125 A
Section	35 mm ²
Norm	EN-60947-7-1


COLOURS

	V2	V0	
	Order No.	Order No.	Pcs.
COLOUR			
GREY	1142	0892	30
CREAM	1143	0893	30
BLACK	1144	0894	30
BLUE	1145	0895	30
BROWN	1146	0896	30
RED	1147	0897	30
YELLOW	1148	0898	30
GREEN	1149	0899	30

ACCESSORIES


Cross Connection	Order No.	Section	Pcs.
	2266	35 / 2	50
	2267	35 / 3	40
	2268	35 / 4	40
	2269	35 / 5	25
	2274	35 / 10	10
Stopper	1202, 1222, 1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		

MRK SERIES TRANSFER CONNECTORS

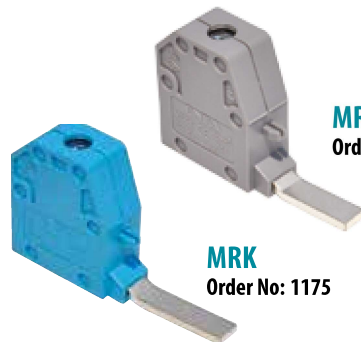

MRK
Order No: 1162

MRK
Order No: 1175

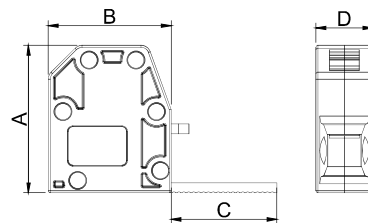

Dimensions (mm)	Code	A	B	C	
	1162	30	25	18	11,5
	1175	30	25	23	11,5

MATERIAL

Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	18 mm
Torque	2,0 Nm

DATA / VERI	TSE / CE
Voltage	750 V
Current	76 A
Section	16 mm ²
Norm	EN-60947-7-1

COLOURS

COLOUR	Order No.	Pcs. /Ad.
GREY	1162 1172	100
CREAM	1163 1173	100
BLACK	1164 1174	100
BLUE	1165 1175	100
BROWN	1166 1176	100
RED	1167 1177	100
YELLOW	1168 1178	100
GREEN	1169 1179	100



ACCESSORIES

Marking	9540 / 9770 / 4442
---------	--------------------



MRK SERIES SCREWED TYPE DOUBLE RAIL TERMINAL BLOCKS



MRK-D 2,5
Order No: 1612

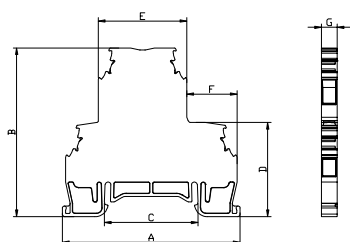

MRK-D 4
Order No: 1652



Dimensions (mm)	A	B	C	D	E	F	G
	66,3	63	34,5	35,2	33	18,75	5,8

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	9 mm
Torque	0,4 Nm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	24 A	24 A
Section	2,5 mm ²	12 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS		
COLOUR	Order No.	Pcs.
GREY	1612	50
CREAM	1613	50
BLACK	1614	50
BLUE	1615	50
BROWN	1616	50
RED	1617	50
YELLOW	1618	50
GREEN	1619	50

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1925	2,5 / 2	100
	1926	2,5 / 3	100
	1927	2,5 / 4	75
	1928	2,5 / 10	30
	1929	2,5 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 4440 / 4442 / 9540 / 7301		
Bridged	1622		

Dimensions (mm)	A	B	C	D	E	F	G
	66,3	63	34,5	35,2	33	18,75	6,6

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	9 mm
Torque	0,5 Nm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	32 A	32 A
Section	4 mm ²	10 AWG
Norm	EN-60947-7-1	UL 1059


COLOURS		
COLOUR	Order No.	Pcs.
GREY	1652	50
CREAM	1653	50
BLACK	1654	50
BLUE	1655	50
BROWN	1656	50
RED	1657	50
YELLOW	1658	50
GREEN	1659	50

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1930	4 / 2	100
	1931	4 / 3	100
	1932	4 / 4	50
	1933	4 / 10	30
	1934	4 / 20	20
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 4442 / 9540 / 7301 / 4390		
Bridged	1662		

MRK SERIES SCREWED CONNECTION FUSED RAIL TERMINAL BLOCKS



MRK-S 6
Order No: 1322

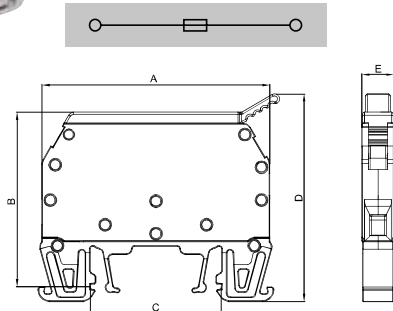

Dimensions (mm)	A	B	C	D	E
	60	47	34,5	54,6	8,8

MATERIAL

Body	PA6.6
Bridge	Copper
Contact /	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	10 mm
Torque	0,8 Nm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	6,3 A	6,3 A
Section	6 mm ²	8 AWG
Norm	EN-60947-7-3	UL 1059

COLOURS

COLOUR	Order No.	Pcs.
GREY	1322	100

ACCESSORIES


Types	Order No.	Pcs.
With Busbar	1332	100
12 V AC/DC Led	1342	100
24 V AC/DC Led	1352	100
48 V AC/DC Led	1372	100
110 V AC/DC Led	1392	100
220 V AC/DC Led	1402	100
Stopper	1202,1222,1212	
Group Sticker	1232	
Marking	9770 / 2630 / 4442 / 9540	
Glass Fuse	WE-FS-52	100
5x20 mm Glass Fuse (0.2.....10A Please inform amp.)		



MRK SERIES SCREWED CONNECTION KNIFE DISCONNECT TERMINAL BLOCK



MRK TEST - 6
Order No: 1316

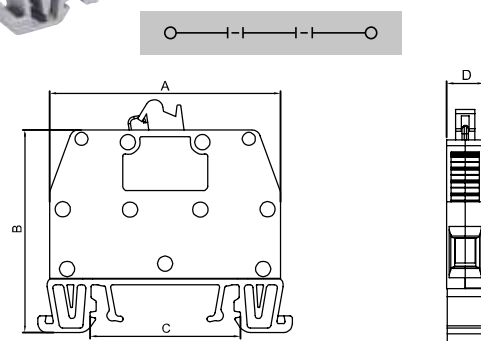

Dimensions (mm)	A	B	C	D
	52,8	46,5	34,5	8,5

MATERIAL

Body	PA6.6
Bridge	Copper
Contact /	CK45 Steel
Screw	Brass
Temp.	-40 °C, +140 °C
Cable Strip L.	12 mm
Torque	0,8 Nm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	41 A	41 A
Section	6 mm ²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS

COLOUR	Order No.	Pcs.
BEIGE	1316	100
GREY	1317	100



ACCESSORIES

Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 2630 / 4442 / 9540

MRK NEW SERIES TEST DISCONNECT TERMINAL BLOCKS



MRK TEST - 6
Without Test Socket
Order No: 1285

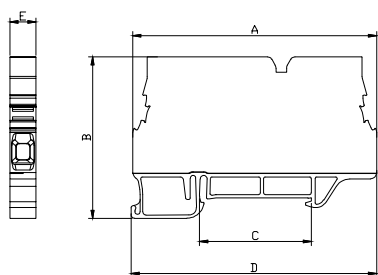

Dimensions (mm)	A	B	C	D	E
	75,5	50	34,5	76	8,1

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	12 mm
Torque	0,8 Nm



DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6 mm ²
Norm	EN-60947-7-1

COLOURS		
COLOUR	Order No.	Pcs.
BEIGE	1286	50

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1935	6 / 2	100
	1936	6 / 3	50
	1937	6 / 4	50
	1938	6 / 10	15
	1939	6 / 20	10
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		



MRK TEST - 6
Single Test Socket
Order No: 1281

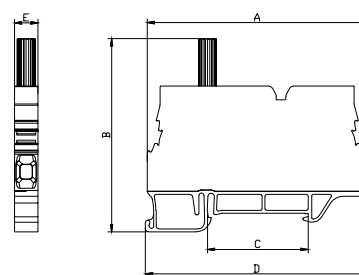

Dimensions (mm)	A	B	C	D	E
	75,5	66,3	34,5	76	8,1

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	12 mm
Torque	0,8 Nm

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6 mm ²
Norm	EN-60947-7-1


COLOURS		
COLOUR	Order No.	Pcs.
BEIGE	1282	50

ACCESSORIES			
Cross Connection	Order No.	Section	Pcs.
	1935	6 / 2	100
	1936	6 / 3	50
	1937	6 / 4	50
	1938	6 / 10	15
	1939	6 / 20	10
	1970	6 / 2	10
	1971	6 / 3	10
	1972	6 / 4	10
	1973	6 / 6	10
	1974	6 / 10	10
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		

MRK NEW SERIES TEST DISCONNECT TERMINAL BLOCKS



MRK TEST - 6
Double Test Socket
Order No: 1283



Dimensions (mm)	A	B	C	D	E
	75,5	66,3	34,5	76	8,1

MATERIAL

Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	12 mm
Torque	0,8 Nm

DATA	TSE / CE
Voltage	750 V
Current	41 A
Section	6 mm ²
Norm	EN-60947-7-1


COLOURS

COLOUR	Order No.	Pcs.
BEIGE	1284	50


ACCESSORIES

Cross Connection	Order No.	Section	Pcs.
	1935	6 / 2	100
	1936	6 / 3	50
	1937	6 / 4	50
	1938	6 / 10	15
	1939	6 / 20	10
	1970	6 / 2	10
	1971	6 / 3	10
	1972	6 / 4	10
	1973	6 / 6	10
	1974	6 / 10	10
Stopper	1202,1222,1212		
Group Sticker	1232		
Marking	9770 / 2630 / 4442 / 9540 / 7301		

MRK 6 TEST DISCONNECT TERMINAL BLOCK ACCESSORIES

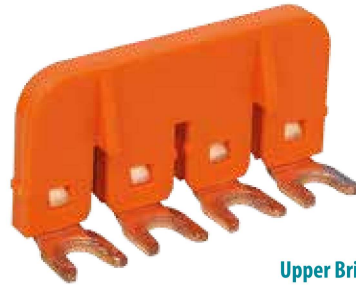


Upper Bridge for Test Sockets

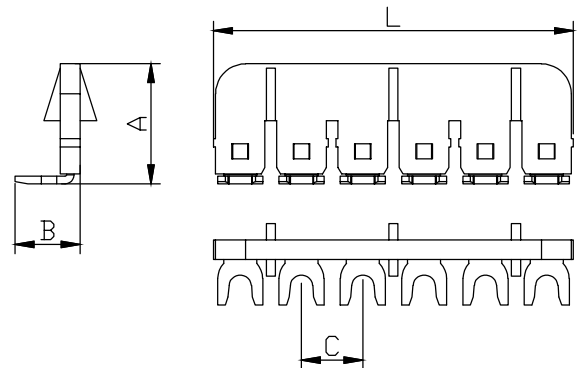

CODE	TYPE	Dimensions (mm)				Pcs
		A	B	C	L	
1970	2 Poles	16	8,6	8,1	15,2	10
1971	3 Poles	16	8,6	8,1	23,4	10
1972	4 Poles	16	8,6	8,1	31,5	10
1973	6 Poles	16	8,6	8,1	47,8	10
1974	10 Poles	16	8,6	8,1	80,4	10

MATERIAL

Body	PA6.6
Bridge	Copper
Temp.	-40 °C, +140 °C

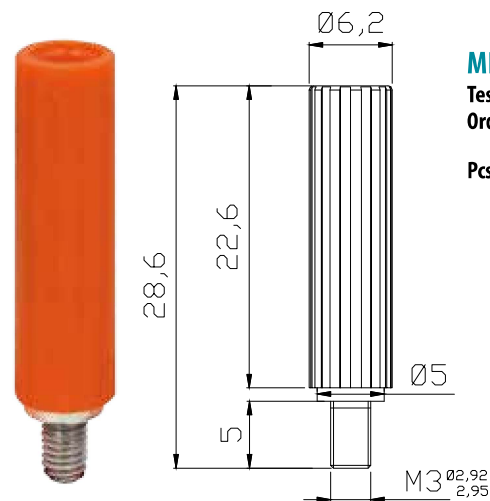


MRK TEST - 6
Test Socket
Order No: 1280

Pcs: 10


MATERIAL

Body	PA6.6
Bridge	Brass
Temp.	-40 °C, +140 °C

MRK SERIES TEST DISCONNECT TERMINAL BLOCKS



MRK TEST - 10
Without Test Socket
Order No: 1312

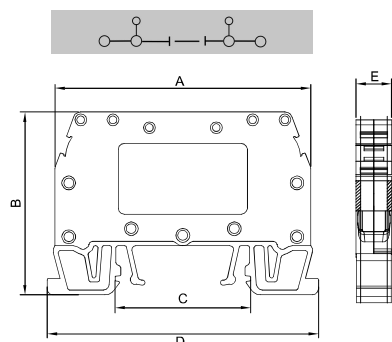

Dimensions (mm)	A	B	C	D	E
	65	46,5	34,5	69	9,1

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	12 mm
Torque	0,8 Nm


DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	50 A
Section	10 mm ²	8 AWG
Norm	EN-60947-7-1	UL 1059

COLOURS		
COLOUR	Order No.	Pcs.
BEIGE	1315	75

ACCESSORIES		
	Order No.	Pcs.
Upper Bridge 2 Poles	1303	100
Upper Bridge 4 Poles	1318	50
Upper Bridge 8 Poles	1302	50
Testing Screw	1319	50
Stopper	1202,1222,1212	
Group Sticker	1232	
Marking	9770 / 2630 / 4442 / 9540	



MRK TEST - 10
Single Test Socket
Order No: 1306

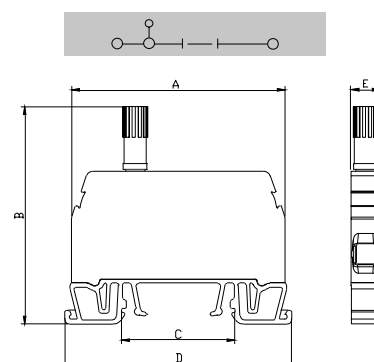

Dimensions (mm)	A	B	C	D	E
	65	66,1	34,5	69	9

MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
Temp.	-40 °C, +140 °C
Cable Strip L.	12 mm
Torque	0,8 Nm

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	50 A
Section	10 mm ²	8 AWG
Norm	EN-60947-7-1	UL 1059


COLOURS		
COLOUR	Order No.	Pcs.
BEIGE	1307	75

ACCESSORIES		
	Order No.	Pcs.
Upper Bridge 2 Poles	1303	100
Upper Bridge 4 Poles	1318	50
Upper Bridge 8 Poles	1302	50
Testing Screw	1319	50
Stopper	1202,1222,1212	
Group Sticker	1232	
Marking	9770 / 2630 / 4442 / 9540	

MRK SERIES TEST DISCONNECT TERMINAL BLOCKS



MRK TEST - 10
Double Test Socket
Order No: 1308



Dimensions (mm)	A	B	C	D	E
	65	66,1	34,5	69	9
MATERIAL					
Body	PA6.6				
Bridge	Copper				
Contact	CK45 Steel				
Screw	Steel				
Temp.	-40 °C, +140 °C				
Cable Strip L.	12 mm				
Torque	0,8 Nm				

DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	50 A
Section	10 mm ²	8 AWG
Norm	EN-60947-7-1	UL 1059



COLOURS		
COLOUR	Order No.	Pcs.
BEIGE	1309	75

ACCESSORIES		
	Order No.	Pcs.
Upper Bridge 2 Poles	1303	100
Upper Bridge 4 Poles	1318	50
Upper Bridge 8 Poles	1302	50
Testing Screw	1319	50
Stopper	1202,1222,1212	
Group Sticker	1232	
Marking	9770 / 2630 / 4442 9540	

MRK SERIES TEST DISCONNECT TERMINAL SET



MRK TEST - 10
4 Poles Test Disconnect Set
Order No: 1305

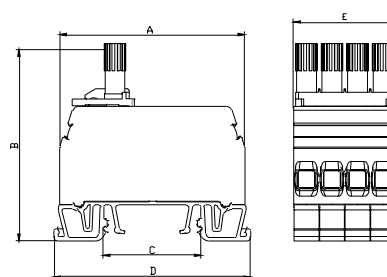


Dimensions (mm)	A	B	C	D	E
	65	68,1	34,5	69	36
MATERIAL					
Body	PA6.6				
Bridge	Copper				
Contact	CK45 Steel				
Screw	Steel				
Temp.	-40 °C, +140 °C				
Cable Strip L.	12 mm				
Torque	0,8 Nm				


DATA	TSE / CE	UL
Voltage	750 V	600 V
Current	57 A	50 A
Section	10 mm ²	8 AWG
Norm	EN-60947-7-1	UL 1059

ACCESSORIES		
	Order No.	Pcs.
Double Test	1308	75
Upper Bridge 2 Poles	1303	100
Upper Bridge 4 Poles	1318	50
Upper Bridge 8 Poles	1302	50
Testing Screw	1319	50
Stopper	1202,1222,1212	
Group Sticker	1232	
Marking /	9770 / 2630 / 4442 9540	

MRK 10 TEST DISCONNECT TERMINAL BLOCKS ACCESSORIES




Upper Bridge for Test Sockets, 2 Poles
Order No: 1303

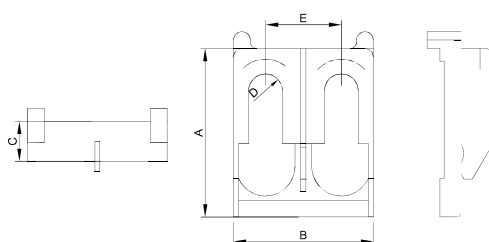


Dimensions (mm)	A	B	C	D	E
1303	22	22	4,7	4	9
1318	22	34,6	4,7	4	9


MATERIAL	
Body	PA6.6
Temp.	-40 °C, +140 °C
Metal Leg	Copper



Upper Bridge for Test Sockets, 4 Poles
Order No: 1318

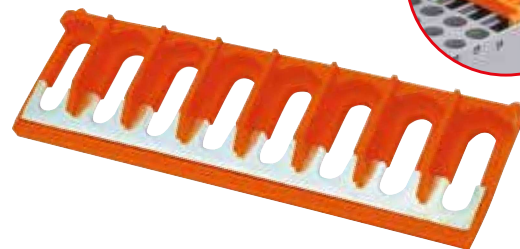


Upper Bridge for Test Sockets, 8 Poles
Order No: 1302

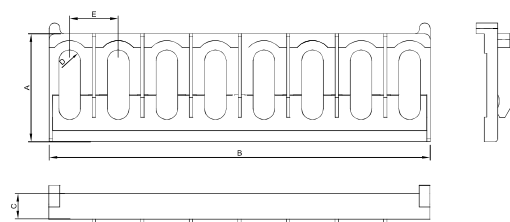

Dimensions (mm)	A	B	C	D	E
	22	71	4,7	4	9


MATERIAL	
Body	PA6.6
Temp.	-40 °C, +140 °C
Metal Leg	Copper

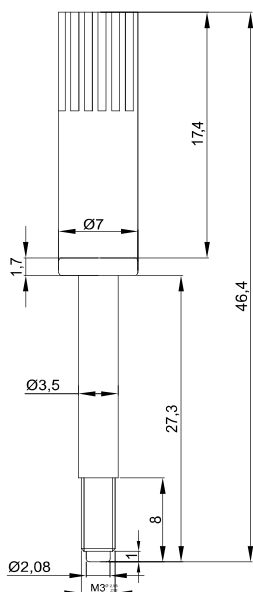

Testing Screw
Order No: 1319



MATERIAL	
Body	PA6.6
Screw	Brass
Temp./	-40 °C, +140 °C


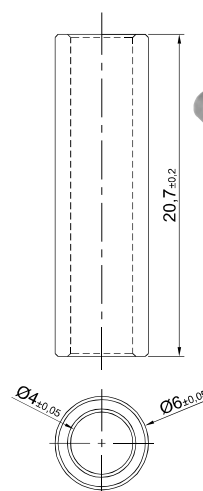


Explosive for Upper Bridge
Order No: 1304




MATERIAL	
Body	Brass

MRK SERIES SCREW CONNECTION EARTH RAIL TERMINAL BLOCKS

**MTK 2,5**

Order No: 1291

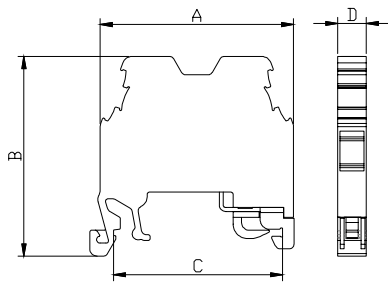

Dimensions (mm)	A	B	C	D
	40	41,3	34,5	5,9


MATERIAL

Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
The Foot Which Contact to the Rail	Brass
Temp.	-40 °C, +140 °C
Cable Strip L.	9 mm
Torque	0,4 Nm


DATA	TSE / CE
Voltage	750 V
Section	2,5 mm ²
Norm	EN-60947-7-2
Pcs	100

ACCESSORIES

Stopper	1202,1222,1212
Group Sticker	1232
Marking	9540 / 9770 / 4440 / 4442 / 7301

**MTK 4**

Order No: 1293

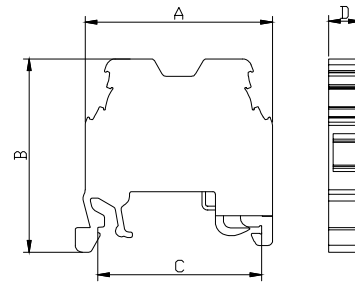

Dimensions (mm)	A	B	C	D
	40	41,3	34,5	6,8

MATERIAL



Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
The Foot Which Contact to the Rail	Brass
Temp.	-40 °C, +140 °C
Cable Strip L.	9 mm
Torque	0,5 Nm

DATA	TSE / CE	UL
Voltage	750 V	300 V
Section	4,0 mm ²	10 AWG
Norm	EN-60947-7-2	UL 1059
Pcs	100	

ACCESSORIES


Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540 / 4390 / 7301

MRK SERIES SCREW CONNECTION EARTH RAIL TERMINAL BLOCKS



MTK 10


Order No: 1294

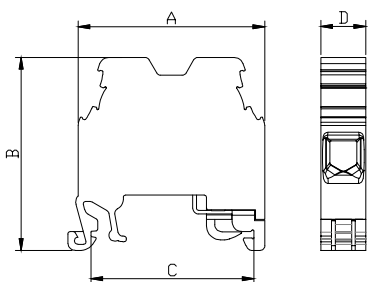

Dimensions (mm)	A	B	C	D
	40	41,3	34,5	9,6
MATERIAL				
Body	PA6.6			
Bridge	Copper			
Contact	CK45 Steel			
Screw	Steel			
The Foot Which Contact to the Rail	Brass			
Temp.	-40 °C, +140 °C			
Cable Strip L.	10 mm			
Torque	0,8 Nm			


DATA	TSE / CE	UL
Voltage	750 V	600 V
Section	10 mm ²	8 AWG
Norm	EN-60947-7-2	UL 1059
Pcs	100	

ACCESSORIES	
Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540 / 2630 / 7301



MTK 25

Order No: 1297

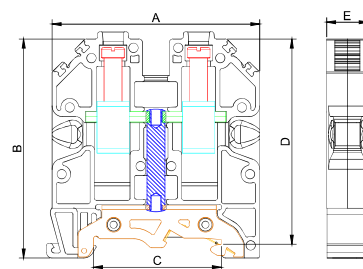

Dimensions (mm)	A	B	C	D	E
	58,2	63,5	34,5	57	11,6


MATERIAL	
Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
The Foot Which Contact to the Rail	Brass
Temp.	-40 °C, +140 °C
Cable Strip L.	16 mm
Torque	1,2 Nm

DATA	TSE / CE
Voltage	750 V
Section	25 mm ²
Norm	EN-60947-7-2
Pcs	50



ACCESSORIES	
Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540

With Non - Insulated Cord End Terminals

MRK SERIES SCREW CONNECTION EARTH RAIL TERMINAL BLOCKS

**MTK 35**

Order No: 1296

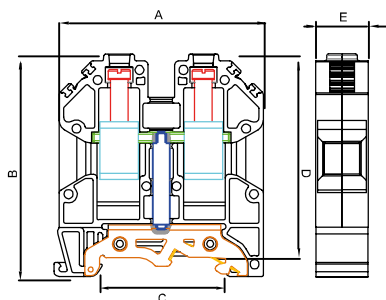

Dimensions (mm)	A	B	C	D	E
	58,2	63,5	34,5	57	14,9

MATERIAL

Body	PA6.6
Bridge	Copper
Contact	CK45 Steel
Screw	Steel
The Foot Which Contact to the Rail	Brass
Temp.	-40 °C, +140 °C
Cable Strip L.	16 mm
Torque	1,2 Nm

DATA / VERİ	TSE / CE
Voltage	750 V
Section	35 mm ²
Norm	EN-60947-7-2
Pcs	30


ACCESSORIES

Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4442 / 9540

MRK AND OPK SERIES BIG STOPPER

**Big Stopper**

Order No: 1212

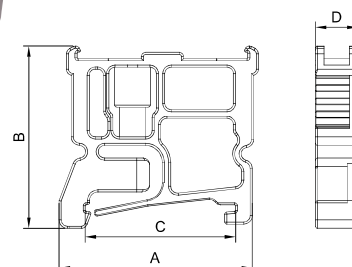

Dimensions (mm)	A	B	C	D
	44,6	43,5	34,5	9,8

MATERIAL

Body	PA
Screw	Steel
Temp.	-40 °C, +140 °C
Pcs	100


ACCESSORIES

Marking	9770 / 4440 / 4442 / 9540 5443 / 4390
---------	---------------------------------------

MRK AND OPK SERIES STOPPER WITH GROUP STICKER

**Stopper With Group Sticker**

Order No: 1232



Dimensions (mm)	A	B	C	D
	44,6	43,5	34,5	9,8

MATERIAL

Body	PA
Screw	Steel
Temp.	-40 °C, +140 °C
Pcs	100


ACCESSORIES

Marking	9770 / 4440 / 4442 / 9540 5443 / 4390
---------	---------------------------------------

MRK AND OPK SERIES SCREWLESS STOPPER




Screwless Stopper
Order No: 1202

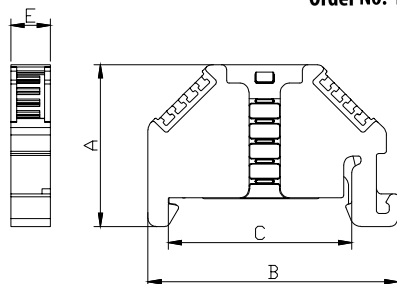


Dimensions (mm)	A	B	C	D
	30,7	47,4	34,5	7,5
MATERIAL				
Body	PA			
Metal Leg	Stainless Steel			
Temp.	-40 °C, +140 °C			
Pcs	100			
ACCESSORIES				
Marking	9770 / 4440 / 4442 / 9540 5443 / 4390 / 2630			

MRK AND OPK SERIES MINI STOPPER



Mini Stopper
Order No: 1222

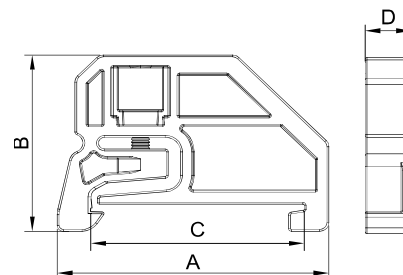


Dimensions (mm)	A	B	C	D
	43,0	30,0	34,5	7,5
MATERIAL				
Body	PA			
Screw	Steel			
Temp.	-40 °C, +140 °C			
Pcs	100			
ACCESSORIES				
Marking	9770 / 4440 / 4442 / 9540 5443 / 4390			

MRK SERIES SEPARATION PLATE




Order No: 0582

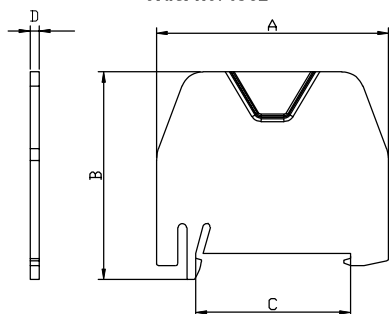


Dimensions (mm)	A	B	C	D
	52,0	48,0	34,5	2,0
MATERIAL				
Body	PA			
Temp.	-40 °C, +140 °C			
Pcs	25			

MRK SERIES SEPARATION PLATE




Order No: 0999

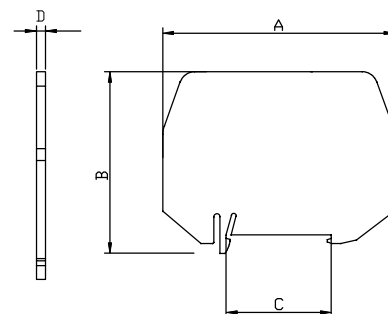

Dimensions (mm)	A	B	C	D
	76,0	60,0	34,5	0,7
MATERIAL				
Body	PET (FF)			
Temp.	-40 °C, +140 °C			
Pcs	25			

PROTECTION COVER

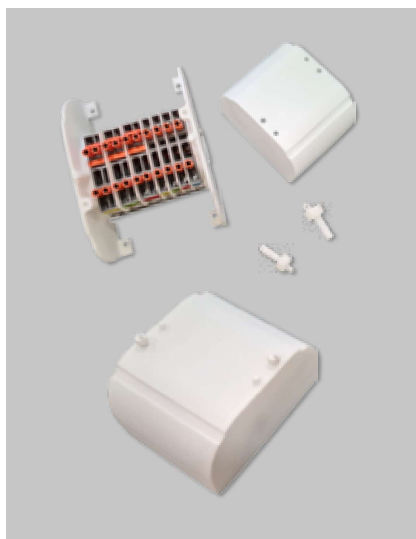


CODE	DESCRIPTIONS
ONKA-1845	Cover Profile (Transparent) mt.
ONKA-1846	Cover Profile (Colored) mt.
ONKA-1847	Side Support Component
ONKA-1848	Resealing Apparatus

GROUP MARKER



Group Marker
Order No: 1482

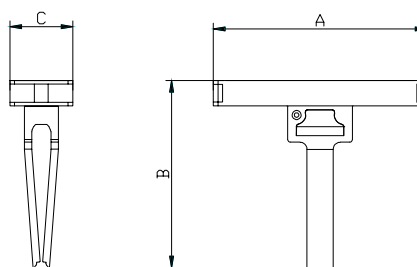

Dimensions (mm)	A	B	C
	46,2	40,6	13,6
MATERIAL			
Body	PC		
Temp.	-40 °C, +140 °C		
Pcs	100		

MRK SERIES CROSS CONNECTIONS

MATERIAL	
Isolation	PA 6.6
Body	Brass
Covering	Tin

Note: All 1,5 mm², 2,5 mm² and 4 mm² cross connections can be both used for MRK and OPK Series.

For the Slim Series, please check the relevant product accessories section.

COLOUR	CODE	TYPE	BOX
Orange	ONKA-1920	1.5 mm ² x 2	100
Orange	ONKA-1921	1.5 mm ² x 3	100
Orange	ONKA-1922	1.5 mm ² x 4	100
Orange	ONKA-1923	1.5 mm ² x 10	30
Orange	ONKA-1924	1.5 mm ² x 20	20
Orange	ONKA-1925	2.5 mm ² x 2	100
Orange	ONKA-1926	2.5 mm ² x 3	100
Orange	ONKA-1927	2.5 mm ² x 4	75
Orange	ONKA-1928	2.5 mm ² x 10	30
Orange	ONKA-1929	2.5 mm ² x 20	20
Orange	ONKA-1930	4 mm ² x 2	100
Orange	ONKA-1931	4 mm ² x 3	100
Orange	ONKA-1932	4 mm ² x 4	50
Orange	ONKA-1933	4 mm ² x 10	30
Orange	ONKA-1934	4 mm ² x 20	20
Orange	ONKA-1935	6 mm ² x 2	100
Orange	ONKA-1936	6 mm ² x 3	50
Orange	ONKA-1937	6 mm ² x 4	50
Orange	ONKA-1938	6 mm ² x 10	15
Orange	ONKA-1939	6 mm ² x 20	10
Orange	ONKA-1940	10 mm ² x 2	100
Orange	ONKA-1941	10 mm ² x 3	50
Orange	ONKA-1942	10 mm ² x 4	50
Orange	ONKA-1943	10 mm ² x 10	15
Orange	ONKA-1944	10 mm ² x 20	10



• Monolithic insulated body provides high durability to the conductor busbar


• Due to the channels on the comb bridge, it gives the chance to be cut from the center of the pin gap. This feature is valid with 10 and 20 pin bridges.



• It can be easily disassembled with a screwdriver, by the help of the notch over the bridge.

• A secure connection with the bridle part

• Continuous and safe contact from four points due to the diagonal structure of the pins




MRK SERIES METAL CROSS CONNECTIONS


CODE	TYPE	BOX
ONKA-2257	16 mm ² x 2	50
ONKA-2258	16 mm ² x 3	40
ONKA-2259	16 mm ² x 4	40
ONKA-2260	16 mm ² x 5	25
ONKA-2261	16 mm ² x 6	10
ONKA-2262	16 mm ² x 7	10
ONKA-2263	16 mm ² x 8	10
ONKA-2264	16 mm ² x 9	10
ONKA-2265	16 mm ² x 10	10
ONKA-2266	35 mm ² x 2	50
ONKA-2267	35 mm ² x 3	40
ONKA-2268	35 mm ² x 4	40
ONKA-2269	35 mm ² x 5	25
ONKA-2270	35 mm ² x 6	10
ONKA-2271	35 mm ² x 7	10
ONKA-2272	35 mm ² x 8	10
ONKA-2273	35 mm ² x 9	10
ONKA-2274	35 mm ² x 10	10



MATERIAL	
Isolation	PA6.6
Body	Brass
Covering	Copper
Screw	Steel

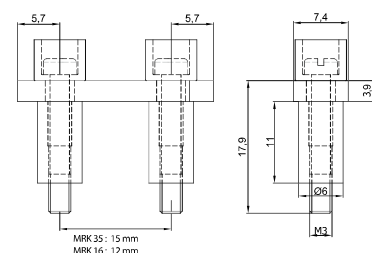

MRK SERIES STUD TERMINAL BLOCKS FOR CABLE LUGS (WITH COVER)

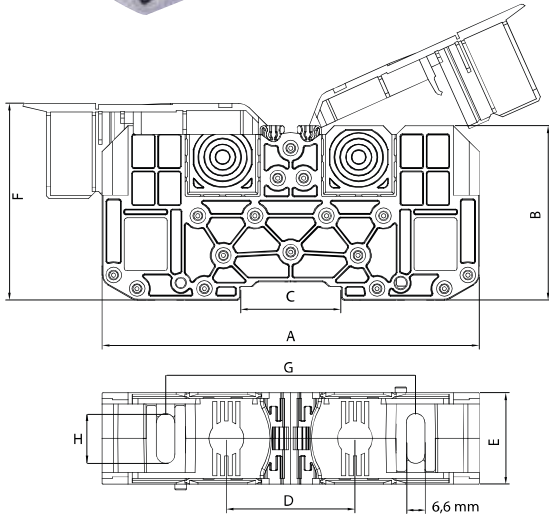

* U_{imp} : Impact strength voltage

MATERIAL

Body	PA6.6
Legs	PA6.6
Cover	PA6.6
Bolt	Steel
Nuts	Steel
Bridge	Copper

ACCESSORIES

Stopper	1202,1222,1212
Group Sticker	1232
Marking	9770 / 4440 / 4442 / 9540

PRODUCT CODE	DESCRIPTION	COLOUR	QTY / BOX
MRC.200.025	Ready Warning Signs, Triangle Edg. L 25 mm	Yellow	1.000

DESCRIPTIONS

CODE	SECTION (mm ²)	VOLTAGE	CURRENT	BOLT	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	H (mm)	Box Carton
ONKA-2302	25	1000 V	101 A	M6	107	50,8	35	40	27	58,5	76,5	16,3	10 / 140
ONKA-2322	35	1000 V	125 A	M8	107	50,8	35	40	27	58,5	76,5	16,3	10 / 140
ONKA-2342	50	1000 V	150 A	M8	107	50,8	35	40	27	58,5	76,5	16,3	10 / 140
ONKA-2362	70	1000 V	192 A	M8	131,5	60,8	35	44,7	31,5	68,5	86,2	17,3	10 / 80
ONKA-2382	95	1000 V	232 A	M8	131,5	60,8	35	44,7	31,5	68,5	86,2	17,3	10 / 80
ONKA-2402	120	1000 V	269 A	M10	139,5	70	35	60	41,4	79	94,6	17,3	5 / 30
ONKA-2422	150	1000 V	309 A	M12	139,5	70	35	60	41,4	79	94,6	17,3	5 / 30
ONKA-2442	185	1000 V	353 A	M12	163,5	77,5	35	60	55	92	96	26,4	5 / 20
ONKA-2462	240	1000 V	415 A	M12	163,5	77,5	35	60	55	92	96	26,4	5 / 20